

RF TRANSFORMERS FARF 5S,5SL SERIES



FEATURES

- Pair wire coil for high stability.
- Base pin terminal treated
- Excellent Frequency Response
- Low Profile Low Cost

OPTIONS


- Bulk Packaging is Standard
- Custom design available dip Available

APPLICATIONS:





- Double balance mixers, broad-band impedance transformers
- Directional Couplers for Mixers
- Matching Power Combining and Splitting
- Step-Top box and cable modem

PHYSICAL CHARACTERISTICS

STANDARD SPECIFICATIONS

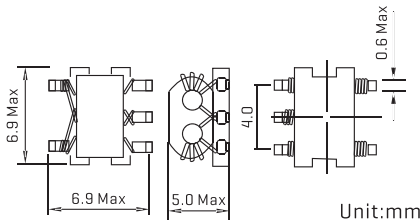

Pin Connections

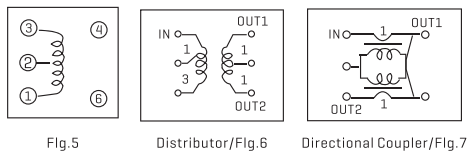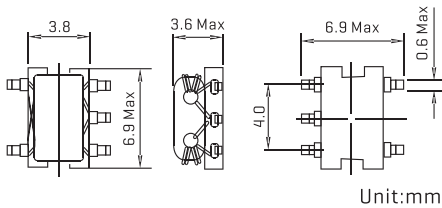

TECHNICAL INFORMATION:

- Soldering methods: Wave, Reflow
- Operating Temperature: 0°C to 70°C
- Storage Temperature: -55°C to 125°C

Note: All specifications subject to change without notice.

	Part Number	Number of Turns per Winding	Operating Frequency Range	Insertion Loss	Fig
Double Balanced Mixer	FARF-5S-1012	1	50MHz-400MHz	10dB max.	1
	FARF-5S-1013	2	100MHz-1.0GHz	6dB max.	1
	FARF-5S-1003	3	8MHz-800MHz	3.5dB max.	1
	FARF-5S-1008	4	6MHz-600MHz	2.5dB max.	1
	FARF-5S-1011	5	5MHz-500MHz	2dB max.	1
	FARF-5S-1005	2	400MHz-1.3MHz	4dB max.	1
Frequency Mixer	FARF-5S-1085	1		3dB max.	2
	FARF-5S-1052	2	9MHz-350MHz	3dB max.	2
	FARF-5S-1024	3	3.5MHz-470GHz	3dB max.	2
	FARF-5S-1086	4	2.2MHz-400MHz	3dB max.	2
	FARF-5S-1087	5	1.5MHz-300MHz	3dB max.	2
Power Divider /Combiner	FARF-5S-1014		20MHz-600MHz	IN to OUT-1.2 4.5dB max. OUT-1 to OUT-2 [ISOLATION] 10dB min.	6
	FARF-5S-1015	4	6MHz-600MHz	IN to OUT-11.3dB max. IN to OUT-2.11dB -14dB	7
Directional Coupler	FARF-5S-1006	5	6MHz-600MHz	IN to OUT-10.9dB max. IN to OUT-2.13dB -16dB	7
	FARF-5S-1007	6	6MHz-600MHz	IN to OUT-10.8dB max. IN to OUT-2.15dB -17dB	7
Double Balanced Mixer	FARF-5SL-1001	2	30MHz-850MHz	3dB	1
	FARF-5SL-1002	3	6.5MHz-1000MHz	3dB	1
	FARF-5SL-1003	4	3.5MHz-1600MHz	3dB	1
	FARF-5SL-1004	5	2.5MHz-1500MHz	3dB	1
	FARF-5SL-1027	1	-	3dB	2
Frequency Mixer	FARF-5SL-1028	2	8MHz-550MHz	3dB	2
	FARF-5SL-1029	3	3.5MHz-500MHz	3dB	2
	FARF-5SL-1030	4	2MHz-370MHz	3dB	2
	FARF-5SL-1037	1	-	3dB	2
	FARF-5SL-1038	2	500MHz-850MHz	3dB	2
	FARF-5SL-1039	3	240MHz-500MHz	3dB	2
	FARF-5SL-1040	4	85MHz-380MHz	3dB	2
	FARF-5SL-1048	11/2	5.5MHz-850MHz	3dB	3
Balun Transformer	FARF-5SL-1049	21/2	2.5MHz-2200MHz	3dB	3
	FARF-5SL-1050	31/2	1.2MHz-1700MHz	3dB	3
	FARF-5SL-1051	41/2	0.8MHz-1400MHz	3dB	3
	FARF-5SL-1078	51/2	0.6MHz-1300MHz	3dB	3
	FARF-5SL-1053	11/2	160MHz-2200MHz	3dB	4
Balun Transformer	FARF-5SL-1017	21/2	55MHz-1700MHz	3dB	4
	FARF-5SL-1054	31/2	30MHz-1400MHz	3dB	4

Note: J=±5%, K=±10%, M=±20%