


## SPECIFICATION FOR APPROVAL

### Material

Production:	Sendust Cores
FUAN.P/N:	KS157-075A
AL:	101(nH/N <sup>2</sup> )±8%
Material:	75 μ
Coating Color:	Black
Coating material:	epoxy
Coating Breakdown Voltage:	1000V, 0.5mA, 2Sec

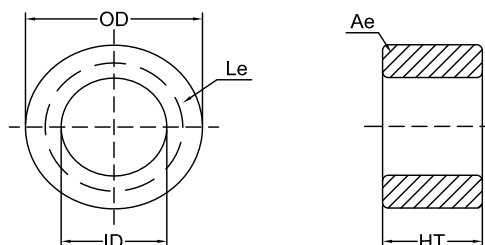


### Physical Characteristics

Before Coating			After Coating			Le(cm)	Ae(cm <sup>2</sup> )	V(cm <sup>3</sup> )	W(cm <sup>2</sup> )	Weight (g) (ref.)	Box Quantity (Pieces)
OD(Max.) in/mm	ID(Min.) in/mm	Ht(Max.) in/mm	OD(Max.) mm	ID(Min.) mm	Ht(Max.) mm						
1.571 39.90	0.949 24.10	0.571 14.50	40.72	23.30	15.37	9.840	1.072	10.500	4.262	65.5	150


### Electrical Parameters(Typical)      Temperature(25°C±2°C)

Test Item	Test Condition	Value(Typical)	Test Instrument
Inductance	φ0.80mm/52Ts, 20kHz/1V, I=0A (Evenly full windings)	273.1μH±8%	CH3302
DC-Bias	φ0.80mm/52Ts, 20kHz/1V, I=7.5A(H=50Oe) (Evenly full windings)	158.3μH(Min.)	WK3255B+WK3265B
Core Loss	50kHz/1000Gs	350mW/cm <sup>3</sup> (Max.)	SY-8219
Remarks	Set the internal resistance of LCR meter to 100Ω.		

### Core Loss Curves(Typical)

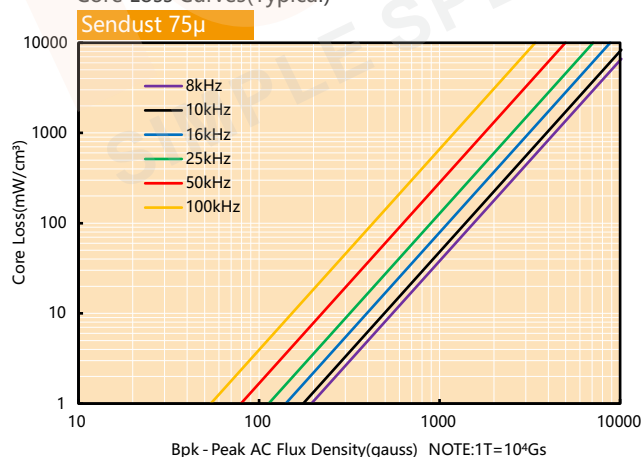

### DC-Bias Curves(Typical)

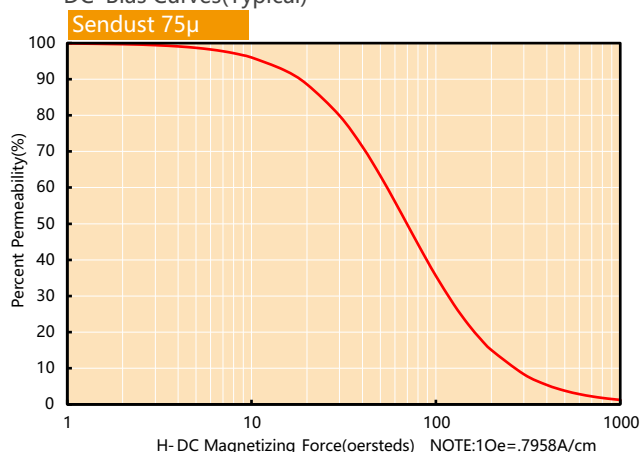

Sendust Cores (KS Series) is made from 85% Fe, 9%Si and 6%Al. It named KoolMu by Magnetics. This material has low loss and relative high saturation flux density (10500Gs). it is very suitable for applying in PFC Chokes, Fly-back Transformers and Storage Filter Inductors. This soft magnetic material is magnetostriction is almost zero, so is special suitable for eliminating the In-line Noise Filters. Sendust Cores do not use organic binding material during the production, so it don' t does not have the problem of Thermal Aging. It can work in the environment of 200°C for a long time. Permeability that we can made now is 26ui-125ui in toroid , U type, E type and block. It is the best cost performance magnetic powder.