

0.08W EE20/4 FAPE2004 SERIES



FEATURES

Frequency 50/60Hz
 Potted under vacuum
 Split-bobbin
 Temperature class ta 70°C/B
 Short-circuit-proof [where noted:
 1/2/3* under Agency Approvals]
 Weight: 0.018kg
 Packaging unit: 40 pieces [tray]

OPTIONS

Bulk packaging is standard
 Custom design available


COMMON APPLICATIONS

Medical equipments
 Industrial equipments
 Industrial controls
 Test equipments
 Industrial computers
 Avionics & telecom

ELECTRICAL CHARACTERISTICS AT 25°C

Part Number	Primary [V]	Secondary [V/mA]	No-load voltage[V]	Fig.	Part Number	Primary [V]	Secondary [V/mA]	No-load voltage[V]	Fig.
FAPE200401	230	6 / 13.3	9.2	1	FAPE200406	115	6 / 13.3	9.2	1/2
FAPE200402	230	9 / 8.88	13.6	1	FAPE200407	115	9 / 8.88	13.6	1/2
FAPE200403	230	12 / 6.67	18.3	1	FAPE200408	115	12 / 6.67	18.3	1/2
FAPE200404	230	15 / 5.33	22.6	1	FAPE200409	115	15 / 5.33	22.6	1/2
FAPE200405	230	18 / 4.44	27.2	1	FAPE200410	115	18 / 4.44	27.2	1/2

PHYSICAL CHARACTERISTICS

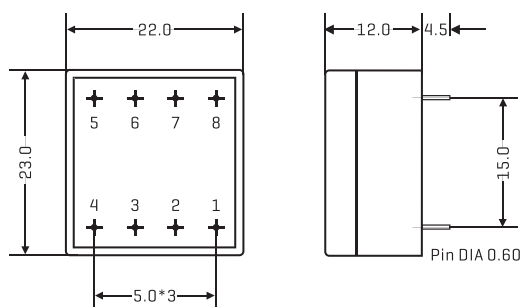

ALL DIMENSIONS IN MM

TECHNICAL INFORMATION




FIG 1