


HIGH FREQUENCY CURRENT SENSOR TRANSFORMER FAACST SERIES



FEATURES

Meets UL94-V0 Requirements
Precise Current Sensing

OPTIONS

Bulk Packaging is Standard
Custom Design Available
Thru Hole Available

COMMON APPLICATIONS

SMPS Control Circuits
Current Sensing
Switching power regulators
Pulse current test

STANDARD SPECIFICATIONS @250°C

Part Number	SCHEMATIC	TURNS [±1% Max]	OCL [mH Min]	DCR [ΩMax]	ET [V-μSEC-Min]
FAACST-001	2A	50	5.0	0.7	150
FAACST-002	2A	100	20.0	1.40	300
FAACST-003	2A	200	80.0	4.50	600
FAACST-004	2A	300	180.0	11.0	900
FAACST-005	2B	50CT	5.0	0.7	150
FAACST-006	2B	100CT	20.0	1.40	300
FAACST-007	2B	200CT	80.0	4.50	600
FAACST-008	2B	300CT	180.0	11.0	900
FAACST-E51	3	100	2.0	5.50	120
FAACST-E52	3	125	3.0	6.50	130

TECHNICAL INFORMATION & PHYSICAL CHARACTERISTICS

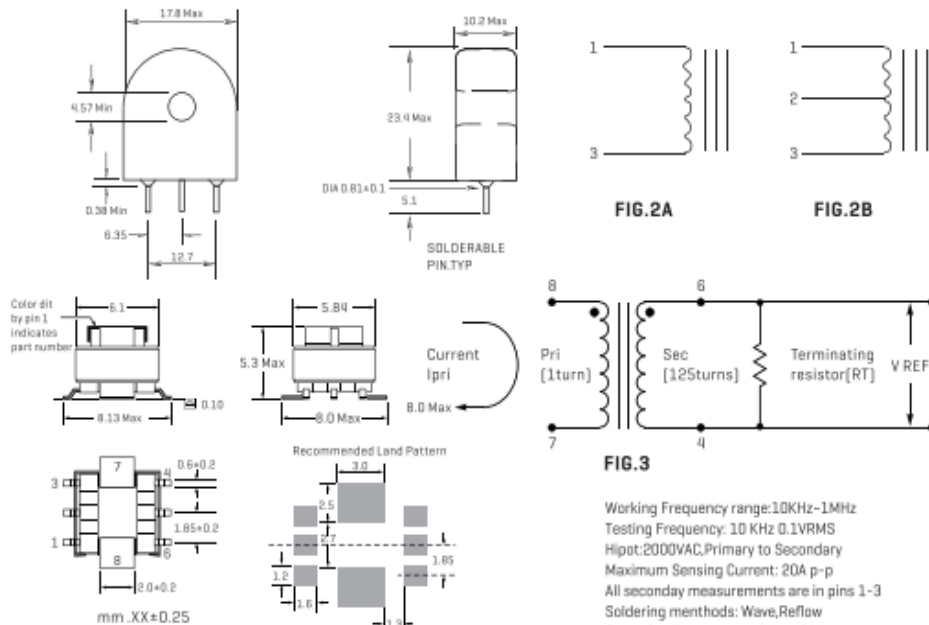


FIG. 3

Working Frequency range: 10KHz-1MHz
Testing Frequency: 10 KHz 0.1VRMS
Hipot: 2000VAC, Primary to Secondary
Maximum Sensing Current: 20A p-p
All secondary measurements are in pins 1-3
Soldering methods: Wave, Reflow
Operating Temperature: 0°C to 85°C
Storage Temperature: -25°C to 85°C
Note: All specifications subject to change without notice