


P/N: FACM26BV-104Y3R0



Outline Dimensions(Unit:mm)

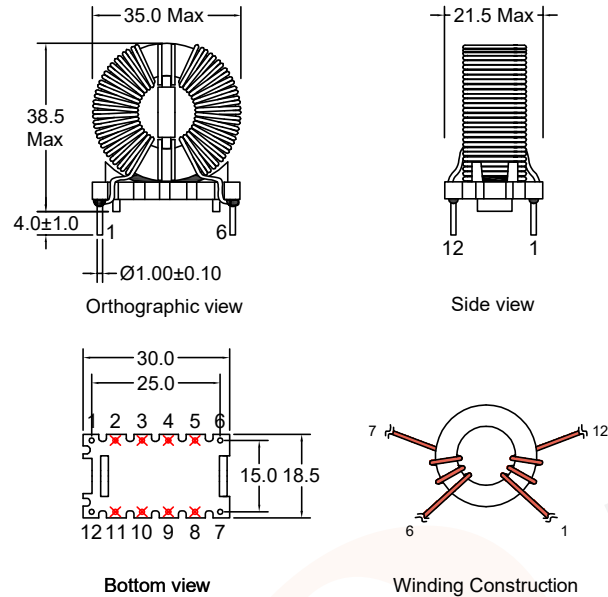


Remarks:  
1. Remove pin 2,3,4,5,8,9,10,11.


Electrical Characteristics(at 25°C)

Inductance : L1-12=6-7= 100mH +50%-30%,at 10KHZ,0.1V.  
 Rated current: 3.00Amps.  
 D.C.Resistance : 1-12= 0.120 ohms Typ.  
 6-7= 0.120 ohms Typ.  
 Turns Ratio : Coil:Coil= 1:1±2%,at 20KHZ,1V.  
 Hipot : Coil-Coil : 1500VAC/5mA/2Second.

Electronical Schematic



Recommended Soldering Temperature Graph.

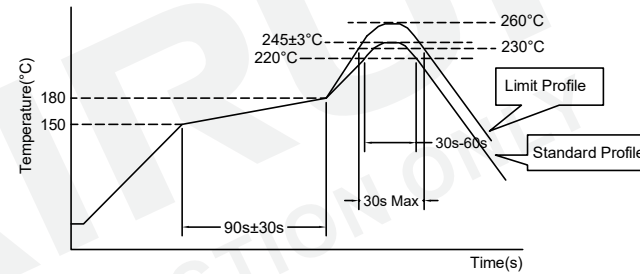

|                  | Standard Profile    | Standard Profile    |
|------------------|---------------------|---------------------|
| Pre-heating      | 150~180°C,90s±30s   |                     |
| Heating          | above 220°C,30s-60s | above 240°C,30s Max |
| Peak temperature | 245°C±3°C           | 260°C,10s           |
| Cycle of reflow  | 2 times             | 2 times             |

List of UL Certificate:

| Part Name   | Mat'l Description | Supplier   | UL Number |
|-------------|-------------------|--|-----------|
| Base        | Base-029/T375J    | Chang Chun Plastics Co Ltd                         | E59481    |
| Copper wire | 2UEW-F/155C       | Elektrisola Hangzhou Co Ltd                        | E258243   |
| Core        | 1K107             | Dongguan Xinda magnetic material technology Co Ltd | N/A       |
| Epoxy       | E-500             | DongGuan Eatto Electronic Material Co Ltd          | E218090   |

|     |             |      |      |   |   |   |   |   |
|-----|-------------|------|------|---|---|---|---|---|
|     |             |      |      | Tianchang Fuan Electronic Co Ltd<br>www.fuantronics.net<br>TEL: +86-550-7814888<br>FAX: +86-550-7831133 |   | Make: Qiumei.Liu<br>Checked: Beson. zhan<br>Approved: Anson. zhan | <b>DRAWING TITLE</b><br>CURRENT-COMPENSATED RING<br>CORE DOUBLE CHOKES<br>Material Number: A31CM026S020 | Customer P/N:<br>Document/Rev: 00<br>Specification Sheet: 1 of 1<br>Date of Recognition: Jan./02/2020 |
| REV | DESCRIPTION | APPD | DATE |   | Tolerances unless otherwise specified:<br>(X)±0.50 (XX)±0.25<br>Unit of measurement: mm |   |   |   |