



P/N: FACCF1515V-103Y1R7-P1


### Outline Dimensions(Unit:mm)

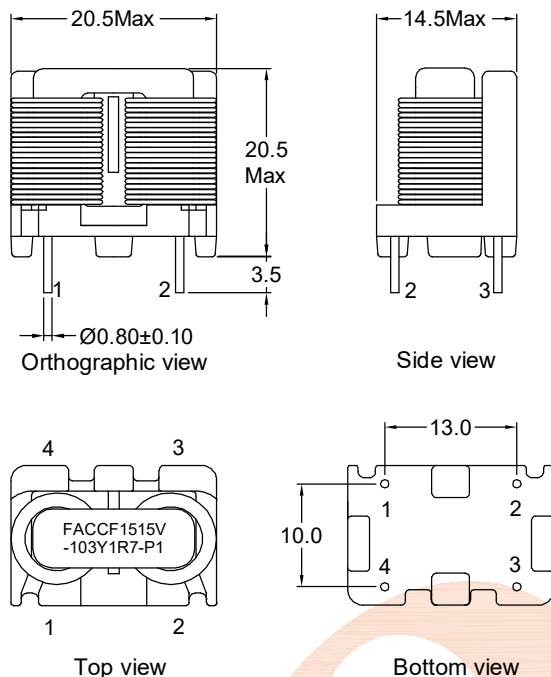

### Electronical Schematic

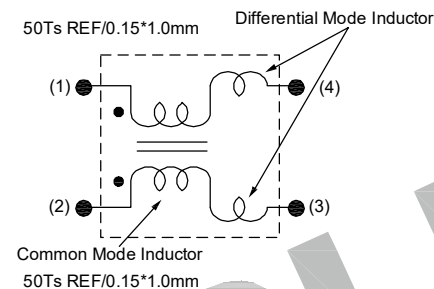

### Simulation test curve:

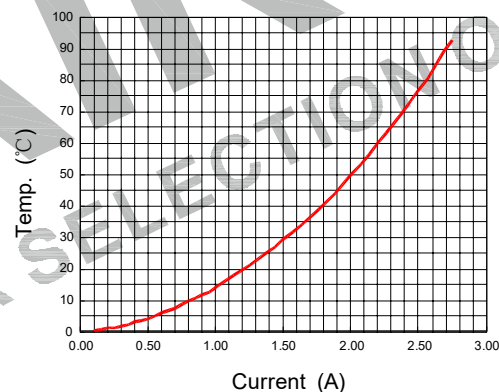

### Electrical Characteristics(at 25°C)


Inductance : 10.0mH Min,at 1KHz,0.25V.  
 Lstray: Lkg=100uH typ,at 1KHz,0.25V.  
 Inductance balance : L1-L2= 200uH Max,at 1KHz,0.25V.  
 D.C.Resistance: 175 mohms Max.  
 Rated current: 1.7Amps.  
 Turns Ratio : 1:1±2%,at 20KHz,1V.  
 Hipot : Pri-Sec : 1500VAC/5mA/2Second.

### List of UL Certificate:

Part Name	Mat'l Description	Supplier	UL Number
Bobbin	SQ1515/T375HF	Chang Chun Plastics Co Ltd	E59481
Copper wire	SFT-UEW-H	Ningbo Jintian New Material Co Ltd	E227047
Core	SQ1515-H10K	Su Zhou Tian Ming Magnetic	N/A
Epoxy or Varnish	YZ-HC-1401C T4260LZ	YouZhi Electronic(DongGuan)Co.,Ltd Suzhou Taihu Electric Advanced Material Co., Ltd	N/A E228349

\*\*\*Weight:Approx 11.3g.

Tianchang Fuan Electronic Co Ltd  
 www.fuantronics.net  
 TEL: +86-550-7814888  
 FAX: +86-550-7831133



Tolerances unless otherwise specified:  
 (.X)±0.50 (.XX)±0.25  
 Unit of measurement: mm

Make: Yuing.yu

Checked: Beson. zhan

Approved: Anson. zhan

#### DRAWING TITLE

CCF1515V Current-compensated  
 frame core double chokes

Material Number:

Customer P/N:

Document/Rev: 2207109/00

Specification Sheet: 1 of 1

Date of Recognition: July./14/2022

REV	DESCRIPTION	APPD	DATE